

## Connector Pins



**Overview**



Page 3 & 4

**Straight**



Page 5

**Swage Mount &  
Right Angle**



Page 6

**Through Board**



Page 7 & 8

**Edge Mount**



Page 9

**Solder Mount  
Polygon**



Page 10 & 11

**Patchcord Crimp**





## Straight

Figure	Basic Part No.	L Length	Board Thickness	L1	A	B	D	D1	D2	D3	Mfg. Hole Diameter
Fig 1	460-2599-01	.051(1.30)	.031(0.79)	.035(0.89)	.156(3.96)	.030(0.76)	.017(0.43)	.049(1.24)	.033(0.84)	.078(1.98)	.052(1.32)
	460-2599-02	.082(2.08)	.062(1.57)	.062(1.57)	.156(3.96)	.030(0.76)	.017(0.43)	.049(1.24)	.033(0.84)	.078(1.98)	.052(1.32)
Fig 2 (Thru' hole)	460-2599-03	.113(2.87)	.094(2.39)	.035(0.89)	.156(3.96)	.030(0.76)	.017(0.43)	.049(1.24)	.033(0.84)	.078(1.98)	.052(1.32)
	460-2599-04	.145(3.68)	.125(3.18)	.035(0.89)	.156(3.96)	.030(0.76)	.017(0.43)	.049(1.24)	.033(0.84)	.078(1.98)	.052(1.32)
Fig 1	460-5247-01	.061(1.55)	.025(0.64)	-	.157(3.99)	.016(0.41)	.017(0.43)	.019(0.48)	-	.039(0.99)	.025(0.64)
	460-5247-02	.075(1.91)	.040(1.02)	-	.157(3.99)	.016(0.41)	.017(0.43)	.019(0.48)	-	.039(0.99)	.025(0.64)
Fig 2 (Thru' hole)	460-2620-01	.051(1.30)	.031(0.79)	.040(1.02)	.150(3.81)	.020(0.51)	.025(0.64)	.031(0.79)	.020(0.51)	.050(1.27)	.035(0.89)
	460-2620-02	.082(2.08)	.062(1.57)	.040(1.02)	.150(3.81)	.020(0.51)	.025(0.64)	.031(0.79)	.020(0.51)	.050(1.27)	.035(0.89)
Fig 1	460-2621-01	.051(1.30)	.031(0.79)	.040(1.02)	.300(7.62)	.020(0.51)	.025(0.64)	.031(0.79)	.020(0.51)	.050(1.27)	.035(0.89)
	460-2621-02	.082(2.08)	.062(1.57)	.040(1.02)	.300(7.62)	.020(0.51)	.025(0.64)	.031(0.79)	.020(0.51)	.050(1.27)	.035(0.89)
Fig 2 (Thru' hole)	460-2625-01	.051(1.30)	.031(0.79)	.040(1.02)	.150(3.81)	.170(4.32)	.025(0.64)	.031(0.79)	.020(0.51)	.050(1.27)	.035(0.89)
	460-2625-02	.082(2.08)	.062(1.57)	.040(1.02)	.150(3.81)	.170(4.32)	.025(0.64)	.031(0.79)	.020(0.51)	.050(1.27)	.035(0.89)
Fig 1	460-2626-01	.051(1.30)	.031(0.79)	.040(1.02)	.150(3.81)	.420(10.67)	.025(0.64)	.031(0.79)	.020(0.51)	.050(1.27)	.035(0.89)
	460-2626-02	.082(2.08)	.062(1.57)	.040(1.02)	.150(3.81)	.420(10.67)	.025(0.64)	.031(0.79)	.020(0.51)	.050(1.27)	.035(0.89)
Fig 2 (Thru' hole)	460-3231-01	.051(1.30)	.031(0.79)	.035(0.89)	.125(3.18)	.025(0.64)	.025(0.64)	.040(1.02)	.025(0.64)	.062(1.57)	.043(1.09)
	460-3231-02	.082(2.08)	.062(1.57)	.035(0.89)	.125(3.18)	.025(0.64)	.025(0.64)	.040(1.02)	.025(0.64)	.062(1.57)	.043(1.09)
Fig 1	460-3231-03	.113(2.87)	.094(2.39)	.035(0.89)	.125(3.18)	.025(0.64)	.025(0.64)	.040(1.02)	.025(0.64)	.062(1.57)	.043(1.09)
	460-3393-01	.062(1.57)	.031(0.79)	.040(1.02)	.125(3.18)	.030(0.76)	.025(0.64)	.058(1.47)	.040(1.02)	.078(1.98)	.062(1.57)
Fig 2 (Thru' hole)	460-3393-02	.094(2.39)	.062(1.57)	.062(1.57)	.125(3.18)	.030(0.76)	.025(0.64)	.058(1.47)	.040(1.02)	.078(1.98)	.062(1.57)
	460-3393-03	.125(3.18)	.094(2.39)	.040(1.02)	.125(3.18)	.030(0.76)	.025(0.64)	.058(1.47)	.040(1.02)	.078(1.98)	.062(1.57)
Fig 1	460-3393-04	.156(3.96)	.125(3.18)	.040(1.02)	.125(3.18)	.030(0.76)	.025(0.64)	.058(1.47)	.040(1.02)	.078(1.98)	.062(1.57)
	460-2983-01	.051(1.30)	.031(0.79)	.040(1.02)	.300(7.62)	.020(0.51)	.031(0.79)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 2 (Thru' hole)	460-2983-02	.082(2.08)	.062(1.57)	.040(1.02)	.300(7.62)	.020(0.51)	.031(0.79)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2983-03	.113(2.87)	.094(2.39)	.040(1.02)	.300(7.62)	.020(0.51)	.031(0.79)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 1	460-2984-01	.051(1.30)	.031(0.79)	.040(1.02)	.150(3.81)	.020(0.51)	.031(0.79)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2984-02	.082(2.08)	.062(1.57)	.040(1.02)	.150(3.81)	.020(0.51)	.031(0.79)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 2 (Thru' hole)	460-2984-03	.113(2.87)	.094(2.39)	.040(1.02)	.150(3.81)	.020(0.51)	.031(0.79)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2627-01	.051(1.30)	.031(0.79)	.040(1.02)	.150(3.81)	.170(4.32)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 1	460-2627-02	.082(2.08)	.062(1.57)	.040(1.02)	.150(3.81)	.170(4.32)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2627-03	.113(2.87)	.094(2.39)	.040(1.02)	.150(3.81)	.170(4.32)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 2 (Thru' hole)	460-2628-01	.051(1.30)	.031(0.79)	.040(1.02)	.150(3.81)	.420(10.67)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2628-02	.082(2.08)	.062(1.57)	.040(1.02)	.150(3.81)	.420(10.67)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 1	460-2628-03	.113(2.87)	.094(2.39)	.040(1.02)	.150(3.81)	.420(10.67)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2946-01	.051(1.30)	.031(0.79)	.040(1.02)	.500(12.70)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 2 (Thru' hole)	460-2946-02	.082(2.08)	.062(1.57)	.040(1.02)	.500(12.70)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2946-03	.113(2.87)	.094(2.39)	.040(1.02)	.500(12.70)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 1	460-2947-01	.051(1.30)	.031(0.79)	.040(1.02)	.750(19.05)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2947-02	.082(2.08)	.062(1.57)	.040(1.02)	.750(19.05)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 2 (Thru' hole)	460-2947-03	.113(2.87)	.094(2.39)	.040(1.02)	.750(19.05)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2948-01	.051(1.30)	.031(0.79)	.040(1.02)	1.000(25.40)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 1	460-2948-02	.082(2.08)	.062(1.57)	.040(1.02)	1.000(25.40)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2948-03	.113(2.87)	.094(2.39)	.040(1.02)	1.000(25.40)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 2 (Thru' hole)	460-2970-01	.051(1.30)	.031(0.79)	.040(1.02)	.300(7.62)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2970-02	.082(2.08)	.062(1.57)	.040(1.02)	.300(7.62)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 1	460-2970-03	.113(2.87)	.094(2.39)	.040(1.02)	.300(7.62)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2971-01	.051(1.30)	.031(0.79)	.040(1.02)	.150(3.81)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 2 (Thru' hole)	460-2971-02	.082(2.08)	.062(1.57)	.040(1.02)	.150(3.81)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2971-03	.113(2.87)	.094(2.39)	.040(1.02)	.150(3.81)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 1	460-2976-01	.051(1.30)	.031(0.79)	.040(1.02)	.188(4.78)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-2976-02	.082(2.08)	.062(1.57)	.040(1.02)	.188(4.78)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
Fig 2 (Thru' hole)	460-2976-03	.113(2.87)	.094(2.39)	.040(1.02)	.188(4.78)	.020(0.51)	.040(1.02)	.040(1.02)	.025(0.64)	.070(1.78)	.043(1.09)
	460-3220-01	.062(1.57)	.031(0.79)	.040(1.02)	.188(4.78)	.020(0.51)	.045(1.14)	.060(1.52)	.042(1.07)	.094(2.39)	.064(1.63)
Fig 1	460-3220-02	.094(2.39)	.062(1.57)	.040(1.02)	.188(4.78)	.020(0.51)	.045(1.14)	.060(1.52)	.042(1.07)	.094(2.39)	.064(1.63)
	460-3220-03	.125(3.18)	.094(2.39)	.040(1.02)	.188(4.78)	.020(0.51)	.045(1.14)	.060(1.52)	.042(1.07)	.094(2.39)	.064(1.63)
Fig 2 (Thru' hole)	460-3220-04	.156(3.96)	.125(3.18)	.040(1.02)	.188(4.78)	.020(0.51)	.045(1.14)	.060(1.52)	.042(1.07)	.094(2.39)	.064(1.63)
	460-3342-01	.053(1.35)	.031(0.79)	.050(1.27)	.188(4.78)	.025(0.64)	.062(1.57)	.062(1.57)	.043(1.09)	.094(2.39)	.067(1.70)
Fig 1	460-3342-02	.084(2.13)	.062(1.57)	.050(1.27)	.188(4.78)	.025(0.64)	.062(1.57)	.062(1.57)	.043(1.09)	.094(2.39)	.067(1.70)
	460-3342-03	.115(2.92)	.094(2.39)	.050(1.27)	.188(4.78)	.025(0.64)	.062(1.57)	.062(1.57)	.043(1.09)	.094(2.39)	.067(1.70)
Fig 2 (Thru' hole)	460-1524-01	.051(1.30)	.031(0.79)	.040(1.02)	.500(12.70)	.030(0.76)	.080(2.03)	.090(2.29)	.067(1.70)	.156(3.96)	.094(2.39)
	460-1524-02	.082(2.08)	.062(1.57)	.040(1.02)	.500(12.70)	.030(0.76)	.080(2.03)	.090(2.29)	.067(1.70)	.156(3.96)	.094(2.39)
Fig 1	460-1524-03	.113(2.87)	.094(2.39)	.040(1.02)	.500(12.70)	.030(0.76)	.080(2.03)	.090(2.29)	.067(1.70)	.156(3.96)	.094(2.39)
	460-2629-02	.094(2.39)	.062(1.57)	.062(1.57)	.375(9.53)	.025(0.64)	.080(2.03)	.090(2.29)	.064(1.63)	.125(3.18)	.094(2.39)
Fig 2 (Thru' hole)	460-2629-03	.125(3.18)	.094(2.39)	.062(1.57)	.375(9.53)	.025(0.64)	.080(2.03)	.090(2.29)	.064(1.63)	.125(3.18)	.094(2.39)
	460-2629-04	.156(3.96)	.125(3.18)	.062(1.57)	.375(9.53)	.025(0.64)	.080(2.03)	.090(2.29)	.064(1.63)	.125(3.18)	.094(2.39)



**Straight**




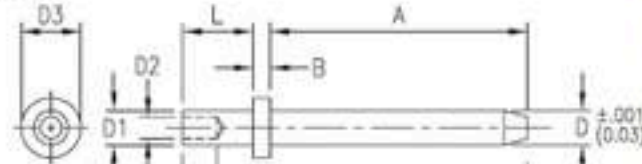
Figure	Basic Part No.	L Length	Board Thickness	L1	A	B	D	D1	D2	D3	Mtg. Hole Diameter
Fig 1 	<b>460-2956-01</b>	.051(1.30)	.031(0.79)	-	.500(12.70)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-2956-02</b>	.082(2.08)	.062(1.57)	-	.500(12.70)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-2956-03</b>	.113(2.87)	.094(2.39)	-	.500(12.70)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
Fig 2 (Thru hole) 	<b>460-2957-01</b>	.051(1.30)	.031(0.79)	-	.750(19.05)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-2957-02</b>	.082(2.08)	.062(1.57)	-	.750(19.05)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-2957-03</b>	.113(2.87)	.094(2.39)	-	.750(19.05)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
Fig 1	<b>460-2958-01</b>	.051(1.30)	.031(0.79)	-	1.000(25.40)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-2958-02</b>	.082(2.08)	.062(1.57)	-	1.000(25.40)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-2958-03</b>	.113(2.87)	.094(2.39)	-	1.000(25.40)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
Fig 1	<b>460-3232-01</b>	.051(1.30)	.031(0.79)	-	.300(7.62)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-3232-02</b>	.082(2.08)	.062(1.57)	-	.300(7.62)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-3232-03</b>	.113(2.87)	.094(2.39)	-	.300(7.62)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
Fig 1	<b>460-3233-01</b>	.051(1.30)	.031(0.79)	-	.150(3.81)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-3233-02</b>	.082(2.08)	.062(1.57)	-	.150(3.81)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-3233-03</b>	.113(2.87)	.094(2.39)	-	.150(3.81)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
Fig 1	<b>460-3241-01</b>	.051(1.30)	.031(0.79)	-	.100(2.54)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-3241-02</b>	.082(2.08)	.062(1.57)	-	.100(2.54)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-3241-03</b>	.113(2.87)	.094(2.39)	-	.100(2.54)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)

Figure	Basic Part No.	L Length	Board Thickness	L1	A	B	D	D1	D2	D3	Mfg. Hole Diameter
Fig 1 	<b>460-2956-01</b>	.051(1.30)	.031(0.79)	-	.500(12.70)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-2956-02</b>	.082(2.08)	.062(1.57)	-	.500(12.70)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-2956-03</b>	.113(2.87)	.094(2.39)	-	.500(12.70)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
Fig 2 (Thru hole) 	<b>460-2957-01</b>	.051(1.30)	.031(0.79)	-	.750(19.05)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-2957-02</b>	.082(2.08)	.062(1.57)	-	.750(19.05)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-2957-03</b>	.113(2.87)	.094(2.39)	-	.750(19.05)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
Fig 1	<b>460-2958-01</b>	.051(1.30)	.031(0.79)	-	1.000(25.40)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-2958-02</b>	.082(2.08)	.062(1.57)	-	1.000(25.40)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-2958-03</b>	.113(2.87)	.094(2.39)	-	1.000(25.40)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
Fig 1	<b>460-3232-01</b>	.051(1.30)	.031(0.79)	-	.300(7.62)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-3232-02</b>	.082(2.08)	.062(1.57)	-	.300(7.62)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-3232-03</b>	.113(2.87)	.094(2.39)	-	.300(7.62)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
Fig 1	<b>460-3233-01</b>	.051(1.30)	.031(0.79)	-	.150(3.81)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-3233-02</b>	.082(2.08)	.062(1.57)	-	.150(3.81)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-3233-03</b>	.113(2.87)	.094(2.39)	-	.150(3.81)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
Fig 1	<b>460-3241-01</b>	.051(1.30)	.031(0.79)	-	.100(2.54)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-3241-02</b>	.082(2.08)	.062(1.57)	-	.100(2.54)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)
	<b>460-3241-03</b>	.113(2.87)	.094(2.39)	-	.100(2.54)	.020(0.51)	.040(1.02)	.040(1.02)	-	.070(1.78)	.043(1.09)

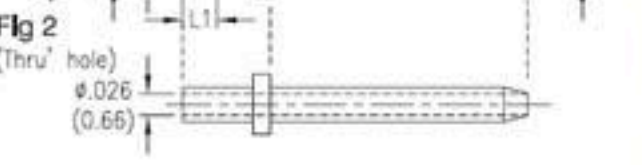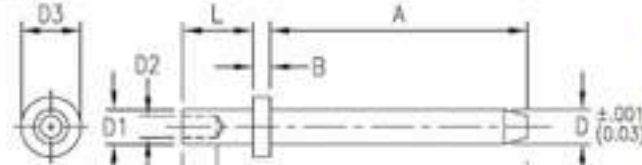

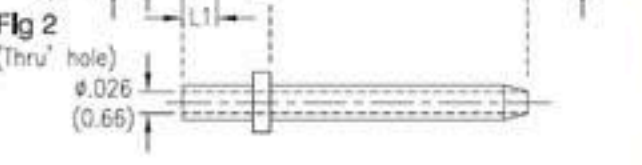

## Swage Mount & Right Angle

Figure	Basic Part No.	L	Board Thickness	L1	L2	A	B	D	D1	D2	D3	Nfg. Hole Diameter
	<b>460-1521-01</b>	.051 (1.30)	.031 (0.79)	.040 (1.02)	.080 (2.03)	.257 (6.53)	.020 (0.51)	.040 (1.02)	.040 (1.02)	.025 (0.64)	.070 (1.78)	.043 (1.09)
	<b>460-1521-02</b>	.082 (2.08)	.061 (1.57)	.040 (1.02)	.080 (2.03)	.257 (6.53)	.020 (0.51)	.040 (1.02)	.040 (1.02)	.025 (0.64)	.070 (1.78)	.043 (1.09)
	<b>460-1521-03</b>	.113 (2.87)	.094 (2.39)	.040 (1.02)	.080 (2.03)	.257 (6.53)	.020 (0.51)	.040 (1.02)	.040 (1.02)	.025 (0.64)	.070 (1.78)	.043 (1.09)
	<b>460-1523-01</b>	.051 (1.30)	.031 (0.79)	.040 (1.02)	.200 (5.08)	.370 (9.40)	.170 (4.32)	.080 (2.03)	.090 (2.29)	.067 (1.70)	.156 (3.96)	.094 (2.39)
	<b>460-1523-02</b>	.082 (2.08)	.061 (1.57)	.040 (1.02)	.200 (5.08)	.370 (9.40)	.170 (4.32)	.080 (2.03)	.090 (2.29)	.067 (1.70)	.156 (3.96)	.094 (2.39)
	<b>460-1523-03</b>	.113 (2.87)	.094 (2.39)	.040 (1.02)	.200 (5.08)	.370 (9.40)	.170 (4.32)	.080 (2.03)	.090 (2.29)	.067 (1.70)	.156 (3.96)	.094 (2.39)

Figure	Basic Part No.	L	Board Thickness	L1	L2	A	B	D	D1	D2	D3	Nfg. Hole Diameter
	<b>460-3889-01</b>	.047 (1.19)	.031 (0.79)	.031 (0.79)	-	.213 (5.41)	.188 (4.78)	.025 (0.64)	.030 (0.76)	.020 (0.51)	.062 (1.57)	.033 (0.84)
	<b>460-3221-01</b>	.062 (1.57)	.031 (0.79)	.040 (1.02)	-	.240 (6.10)	.188 (4.78)	.045 (1.14)	.060 (1.52)	.042 (1.07)	.125 (3.18)	.064 (1.63)
	<b>460-3221-02</b>	.094 (2.39)	.061 (1.57)	.040 (1.02)	-	.240 (6.10)	.188 (4.78)	.045 (1.14)	.060 (1.52)	.042 (1.07)	.125 (3.18)	.064 (1.63)
	<b>460-3221-03</b>	.125 (3.18)	.094 (2.39)	.040 (1.02)	-	.240 (6.10)	.188 (4.78)	.045 (1.14)	.060 (1.52)	.042 (1.07)	.125 (3.18)	.064 (1.63)
	<b>460-3221-04</b>	.156 (3.96)	.125 (3.18)	.040 (1.02)	-	.240 (6.10)	.188 (4.78)	.045 (1.14)	.060 (1.52)	.042 (1.07)	.125 (3.18)	.064 (1.63)





Through Board

Figure	Basic Part No.	L	Board Thickness	A	B	C	D	D1	D2	D3	D4	E	Mfg. Hole Diameter	
	<b>460-3202</b>	.051	.031 (0.79)	.157	.032	.076	.078	.025	.058	.033	.020	.015	.061 (1.57)	
	<b>-01</b>	(1.30)		(3.99)	(.081)	(1.93)	(1.98)	(0.64)	(1.47)	(0.84)	(0.51)	(0.38)		
	<b>460-3202</b>	.082	.061 (1.57)	.157	.032	.076	.078	.025	.058	.033	.020	.015	.061 (1.57)	
	<b>-02</b>	(2.08)		(3.99)	(.081)	(1.93)	(1.98)	(0.64)	(1.47)	(0.84)	(0.51)	(0.38)		
	<b>460-3202</b>	.113	.094 (2.39)	.157	.032	.076	.078	.025	.058	.033	.020	.015	.061 (1.57)	
	<b>-03</b>	(2.87)		(3.99)	(.081)	(1.93)	(1.98)	(0.64)	(1.47)	(0.84)	(0.51)	(0.38)		
	<b>460-5243</b>	.051	.031 (0.79)	.172	.022	.125	.094	.040	.072	.050	.040	.020	.076 (1.93)	
	<b>-01</b>	(1.30)		(4.37)	(0.56)	(3.18)	(2.39)	(1.02)	(1.83)	(1.27)	(1.02)	(0.51)		
	<b>460-5243</b>	.081	.061 (1.57)	.172	.022	.125	.094	.040	.072	.050	.040	.020	.076 (1.93)	
	<b>-02</b>	(2.08)		(4.37)	(0.56)	(3.18)	(2.39)	(1.02)	(1.83)	(1.27)	(1.02)	(1.02)	(0.51)	
	<b>460-5243</b>	.113	.094 (2.39)	.172	.022	.125	.094	.040	.072	.050	.040	.040	.020	.076 (1.93)
	<b>-03</b>	(2.87)		(4.37)	(0.56)	(3.18)	(2.39)	(1.02)	(1.83)	(1.27)	(1.02)	(1.02)	(0.51)	
	<b>460-5243</b>	.145	.125 (3.18)	.172	.022	.125	.094	.040	.072	.050	.040	.040	.020	.076 (1.93)
	<b>-04</b>	(3.68)		(4.37)	(0.56)	(3.18)	(2.39)	(1.02)	(1.83)	(1.27)	(1.02)	(1.02)	(0.51)	
	<b>460-3205</b>	.082	.061 (1.57)	0.22	.032	.082	.125	.062	.090	.060	.040	.020	.094 (2.39)	
<b>-02</b>	(2.08)		(5.59)	(0.81)	(2.08)	(3.18)	(1.57)	(2.29)	(1.52)	(1.02)	(1.02)	(0.51)		
<b>460-3205</b>	.113	.094 (2.39)	0.22	.032	.082	.125	.062	.090	.060	.040	.040	.020	.094 (2.39)	
<b>-03</b>	(2.87)		(5.59)	(0.81)	(2.08)	(3.18)	(1.57)	(2.29)	(1.52)	(1.02)	(1.02)	(0.51)		

Figure	Basic Part No.	L	Board Thickness	A	B	C	D	D1	D2	D3	D4	E	Mfg. Hole Diameter
	<b>460-2605</b>	.105	.061 (1.57)	.410	.035	.172	.156	.080	.116	.088	.050	.020	.120 (3.05)
	<b>-02</b>	(2.67)		(10.40)	(0.89)	(4.37)	(3.96)	(2.03)	(2.95)	(2.24)	(1.27)	(0.51)	
	<b>460-2605</b>	.135	.094 (2.39)	.410	.035	.172	.156	.080	.116	.088	.050	.020	.120 (3.05)
	<b>-03</b>	(3.43)		(10.40)	(0.89)	(4.37)	(3.96)	(2.03)	(2.95)	(2.24)	(1.27)	(0.51)	
	<b>460-2605</b>	.165	.125 (3.18)	.410	.035	.172	.156	.080	.116	.088	.050	.020	.120 (3.05)
	<b>-04</b>	(4.19)		(10.40)	(0.89)	(4.37)	(3.96)	(2.03)	(2.95)	(2.24)	(1.27)	(0.51)	

Edge Mount



Figure	Basic Part No.	A	Board Thickness	B	C	D	E	S
	<u>460-8250-01</u>	.200 (5.08)	-	.117 (2.97)	-	.040 (1.02)	-	-

Figure	Basic Part No.	A	Board Thickness	B	C	D	E	S
	<u>461-2633-01</u>	.188 (4.77)	-	.156 (3.96)	.132 (3.35)	.040 (1.02)	.062 (1.57)	-



## Edge Mount

Figure	Basic Part No.	A	Board Thickness	B	C	D	E	S
<p>Fig 1</p>	<u>461-2634 -01</u>	.200 (5.08)	.031 (0.78)	.156 (3.96)	.125 (3.18)	.040 (1.02)	.062 (1.57)	.045 (1.15)
<p>Fig 2</p>	<u>461-2634 -02</u>	.200 (5.08)	.062 (1.57)	.156 (3.96)	.125 (3.18)	.040 (1.02)	.062 (1.57)	.078 (1.98)
<p>Fig 3</p>								

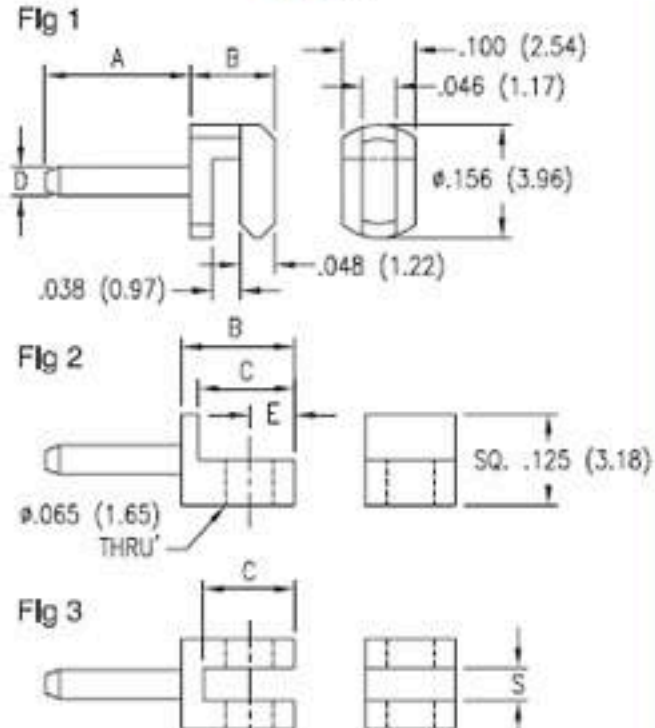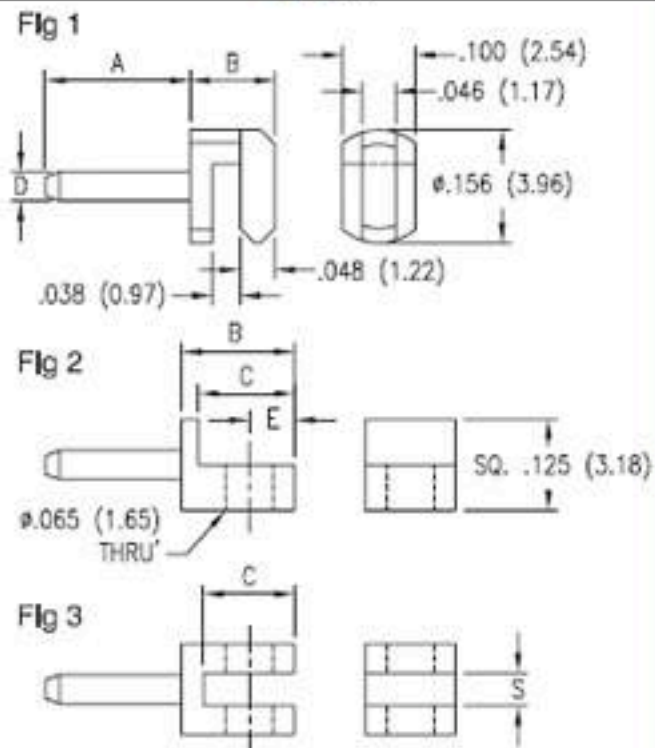



Solder Mount Polygon

Figure	Basic Part No.	Material	Pin dia D	Style	Pin Length A	Stand off Length B	Finish	Mounting Length C
<p>Figure showing technical drawings for four styles of connector pins (STYLE A, B, C, D). Each drawing includes dimensions A, B, and C, and a part number. Style A: #1.24±0.04, #1.83. Style B: #1.83, #1.24±0.04, #2.35, 0.80. Style C: #2.35, #1.27±0.04. Style D: #2.03, #2.07±0.04, #3.00.</p>	<b>B-1-B-0478-0432-3-4</b>	Brass	1.02	B	4.78	4.32	Gold	2.70



## Patchcord Crimp

Figure	Basic Part No.	A	B	D	D1	D2	E	F	G	H	J
	<b>460-3308-01</b>	.282 (7.16)	.306 (7.77)	.105 (2.67)	.077 (1.96)	.040 (1.02)	.031 (0.79)	.060 (1.50)	.029 (0.74)	.282 (7.16)	.188 (4.78)
	<b>460-3368-01</b>	.282 (7.16)	.306 (7.77)	.105 (2.67)	.077 (1.96)	.062 (1.57)	.031 (0.79)	.060 (1.52)	.029 (0.74)	.282 (7.16)	.188 (4.78)
	<b>460-3369-01</b>	.200 (5.08)	.306 (7.77)	.105 (2.67)	-	.080 (2.03)	.031 (0.79)	.060 (1.52)	.029 (0.74)	.282 (7.16)	-
	<b>460-3369-02</b>	.375 (9.53)	.306 (7.77)	.105 (2.67)	-	.080 (2.03)	.031 (0.79)	.060 (1.52)	.029 (0.74)	.282 (7.16)	-
	<b>460-3369-03</b>	.500 (12.70)	.306 (7.77)	.105 (2.67)	-	.080 (2.03)	.031 (0.79)	.060 (1.52)	.029 (0.74)	.282 (7.16)	-

Figure	Basic Part No.	A	B	D	D1	D2	E	F	G	H	J
	<b>460-3299-01</b>	.200 (5.08)	2.96 (7.52)	.141 (3.58)	-	.080 (2.03)	.046 (1.17)	.076 (1.93)	.040 (1.02)	.267 (6.78)	-
	<b>460-3299-02</b>	.375 (9.53)	2.96 (7.52)	.141 (3.58)	-	.080 (2.03)	.046 (1.17)	.076 (1.93)	.040 (1.02)	.267 (6.78)	-
	<b>460-3299-03</b>	.500 (12.70)	2.96 (7.52)	.141 (3.58)	-	.080 (2.03)	.046 (1.17)	.076 (1.93)	.040 (1.02)	.267 (6.78)	-





## Patchcord Crimp

Figure	Basic Part No.	A	B	D	D1	D2	E	F	G	H	J
	<b>460-3050-01</b>	.125 (3.18)	.188 (4.78)	.062 (1.57)	-	.025 (0.64)	.032 (0.81)	.048 (1.22)	.025 (0.64)	.166 (4.22)	-
	<b>461-3102-01</b>	.125 (3.18)	.188 (4.78)	.062 (1.57)	-	.025 (0.64)	.032 (0.81)	.048 (1.22)	.025 (0.64)	.166 (4.22)	-

<b>460-3050 / 461-3102</b>	
Recommended hook-up wire size .039 (0.99) Max. Diameter over Insulation	# 28AWG, 7 strands # 36 AWG copper wire plastic insulated
<b>460-3308 / 460-3368 / 460-3369</b>	
Recommended hook-up wire size .053 (1.37) Max. Diameter over Insulation	# 22AWG, 7 strands # 30 AWG copper wire PTFE insulated
Socket also accommodates	# 20 AWG, 7 strands # 28 AWG copper wire insulated
	# 24 AWG, 7 strands # 32 AWG copper wire insulated
<b>460-3299</b>	
Recommended hook-up wire size	# 20AWG, 7 strands # 28 AWG copper wire PTFE insulated
Socket also accommodates	# 18 AWG, 7 strands # 26 AWG copper wire, insulated
	# 16 AWG, 19 strands # 29 AWG copper wire, insulated



**Etronics Sarl**

8, rue de Témara  
z.a. du bel-air  
F-78108 St. Germain-en Laye  
FRANCE  
Phone: (+33) 1.39.10.29.00  
Mail: [sales@etronics.fr](mailto:sales@etronics.fr)